LOADING PATTERN MATING SIDE

f	O	O	O	O	O	O	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
e	F	F	O	F	O	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
d	O	O	O	F	O	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
c	F	F	O	O	O	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
b	O	O	O	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
a	F	F	O	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
z	O	O	O	O	O	O	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
POS	01				05					10					15					20					25

LOADED CONNECTOR ASSEMBLY
(FOR EXAMPLE)

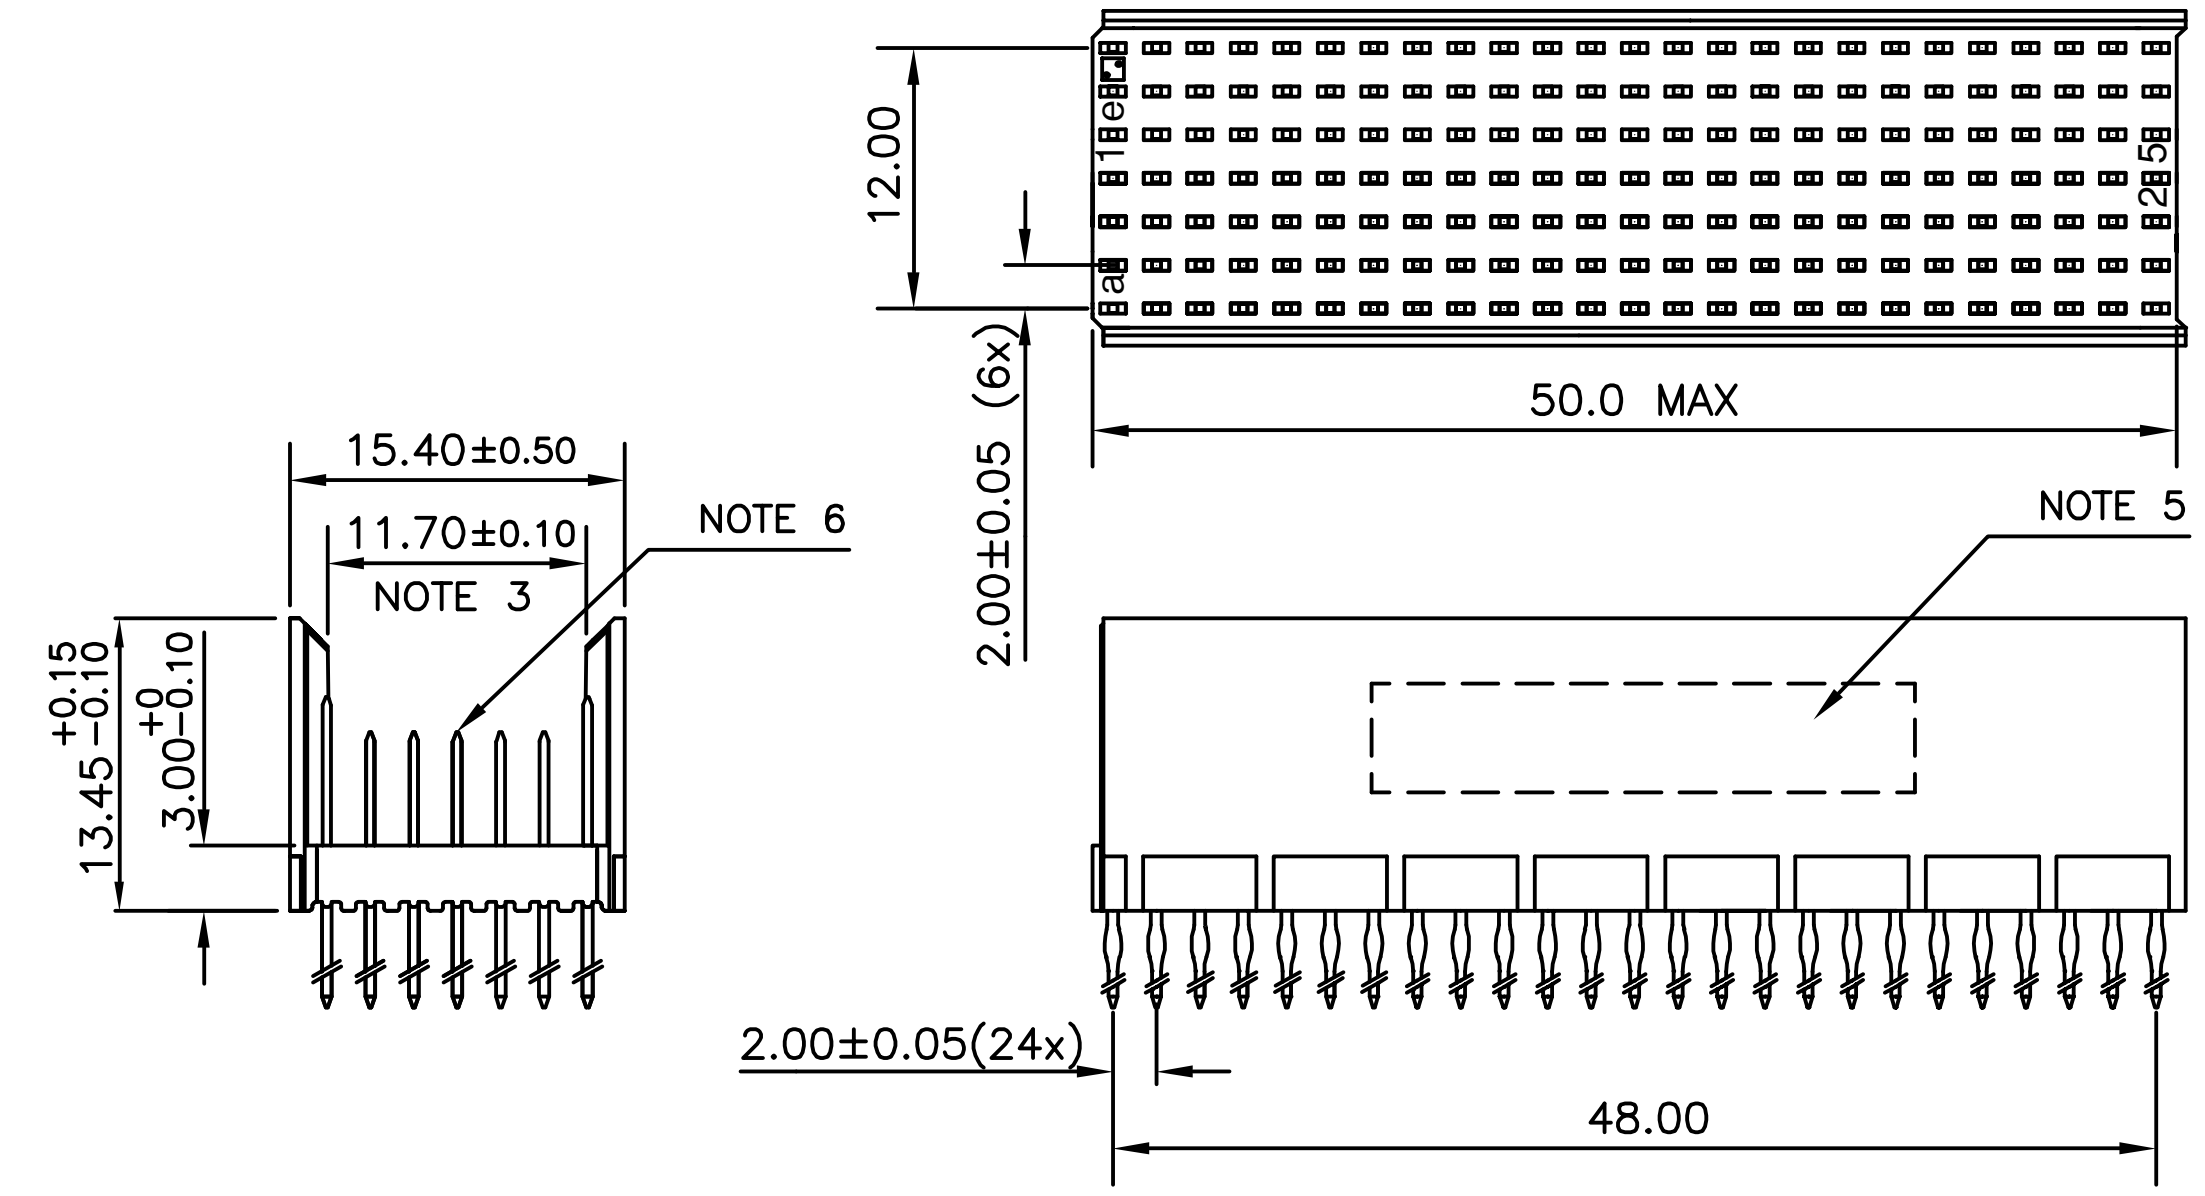

CONTACT OVERVIEW

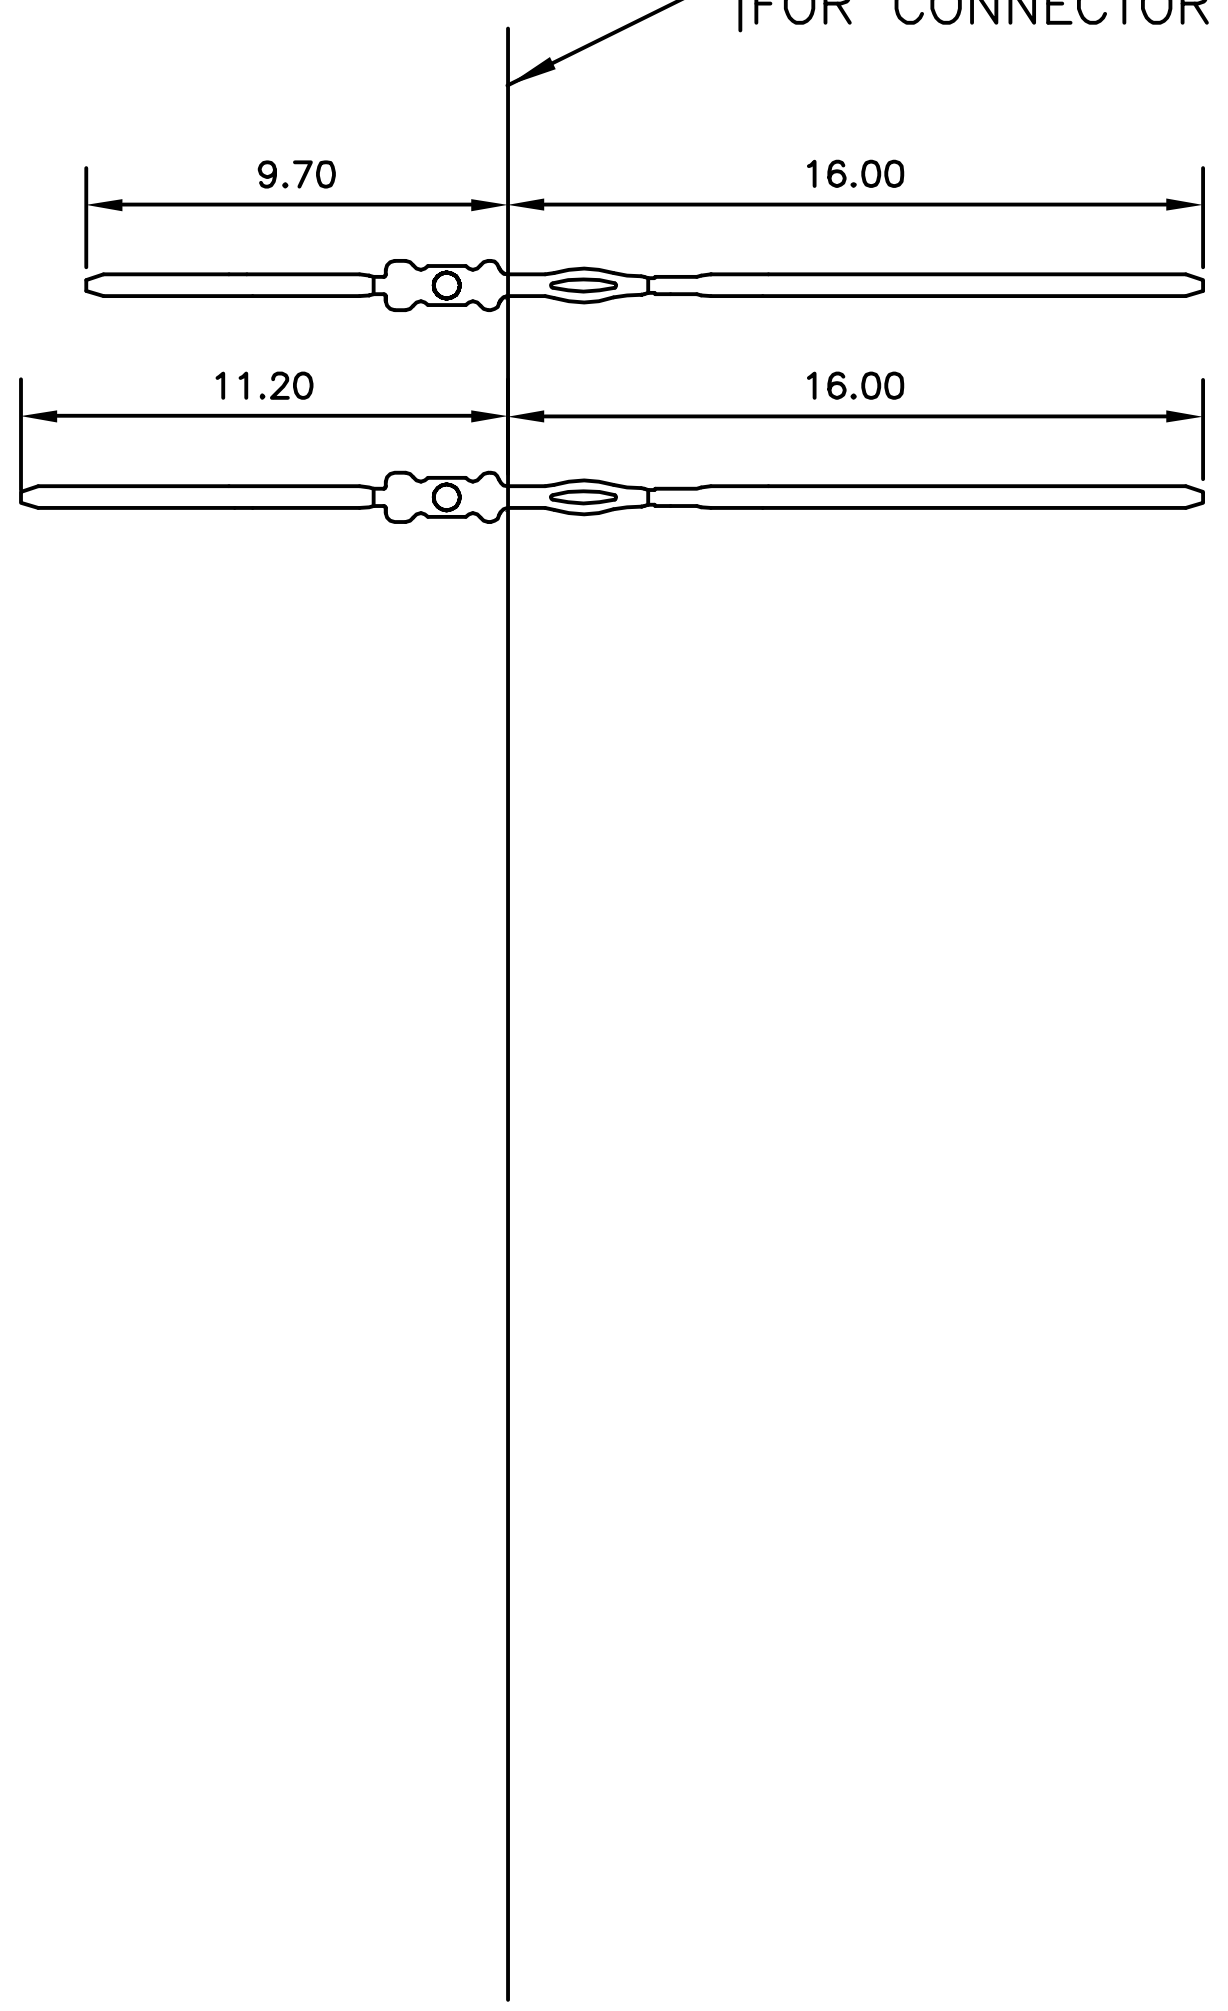

LAY-OUT P.C.B.-HOLE

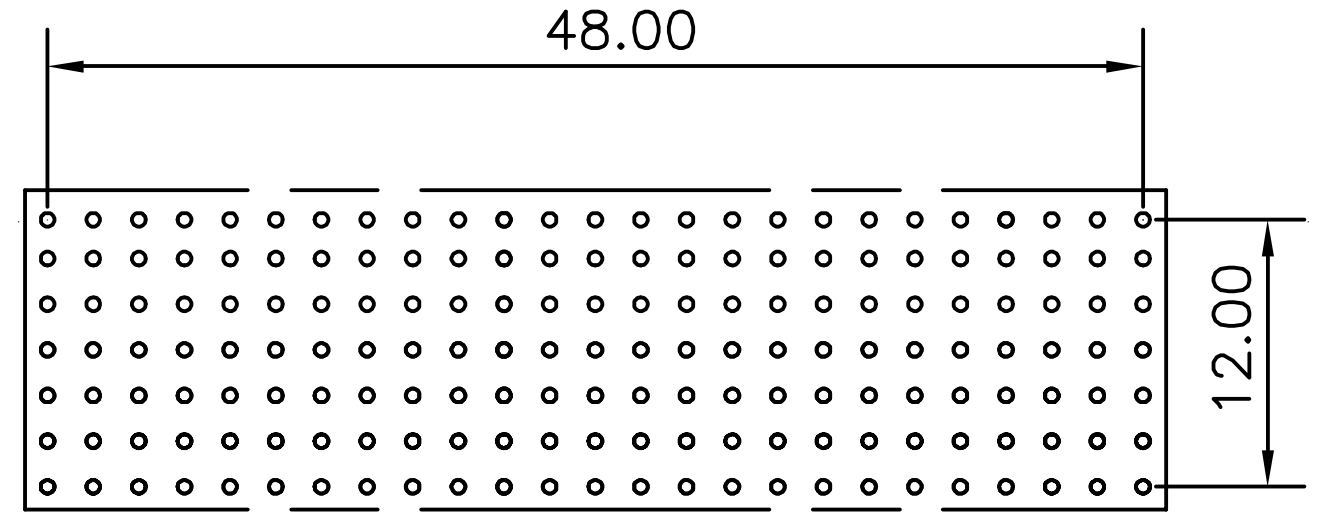

HM2P08PNJ3L5-- --

LEAD FREE INDICATOR : LF = LEAD FREE
(DIGIT 15 & 16)

PLATING CODE (DIGIT 13 AND 14)
(REF DRW NO. BS,C , 201844 , 003)

NOTES

1. THIS PRODUCT IS CSA APPROVED.
2. THIS PRODUCT IS UL RECOGNIZED.
3. MEASURED AT THE BOTTOM.
4. MATERIAL CONTACT: PHOSPHORBRONZE
   HOUSING: CREAM WHITE GLASS FILLED POLYESTER UL-94V0
5. CONNECTOR PRINTED WITH P/N AND DATE CODE.
6. FOR ACTUAL CONTACT LOADINGS, SEE LOADING PATTERN MATING SIDE.
7. SHAPE OF CONNECTOR HOUSING CAN ALTER DEPENDING ON
   PRODUCTION LOCATION
8. THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
   REGULATIONS AS DESCRIBED IN GS-22-008
9. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS, A , 201572 , 001

CATALOG NO: HM2P08PNJ3L5----

mat'l. code: SEE NOTE 4	surface: ISO 1302 √	tolerance: ISO 406 ISO 1101	projection
ltr / ecn no / dr / date: A / I07-0011 / MINI / 2007-01-19	tolerances unless otherwise specified	angles 0°±1°; linear .0±0.2, .00±0.1	MM; scale –
dr	MINI K VANDANATH	2007-01-19	
engr	BIJU K PAUL	2007-01-19	
chr	BIJU K PAUL	2007-01-19	
appd	BIJU K PAUL	2007-01-19	
sheet index	revision A	sheet 1	

product family	MILLIPACS
title	MPACS 5+2R STR HDR PF CONN TYPE B
dwg no	BS, C ,203028, 751
sheet	1 of 1
size	A3
type	Product Customer Drawing

FCIconnect.com

Copyright FCI

form: A3

PDM: Rev:A STATUS:Released Printed: Dec 04, 2007