


| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|-----------------|------|------|-----|
| 08/16/03 | A | REVISED TITLE | T.B. | B.S. | |
| | | | | | |
| | | | | | |
| | | | | | |

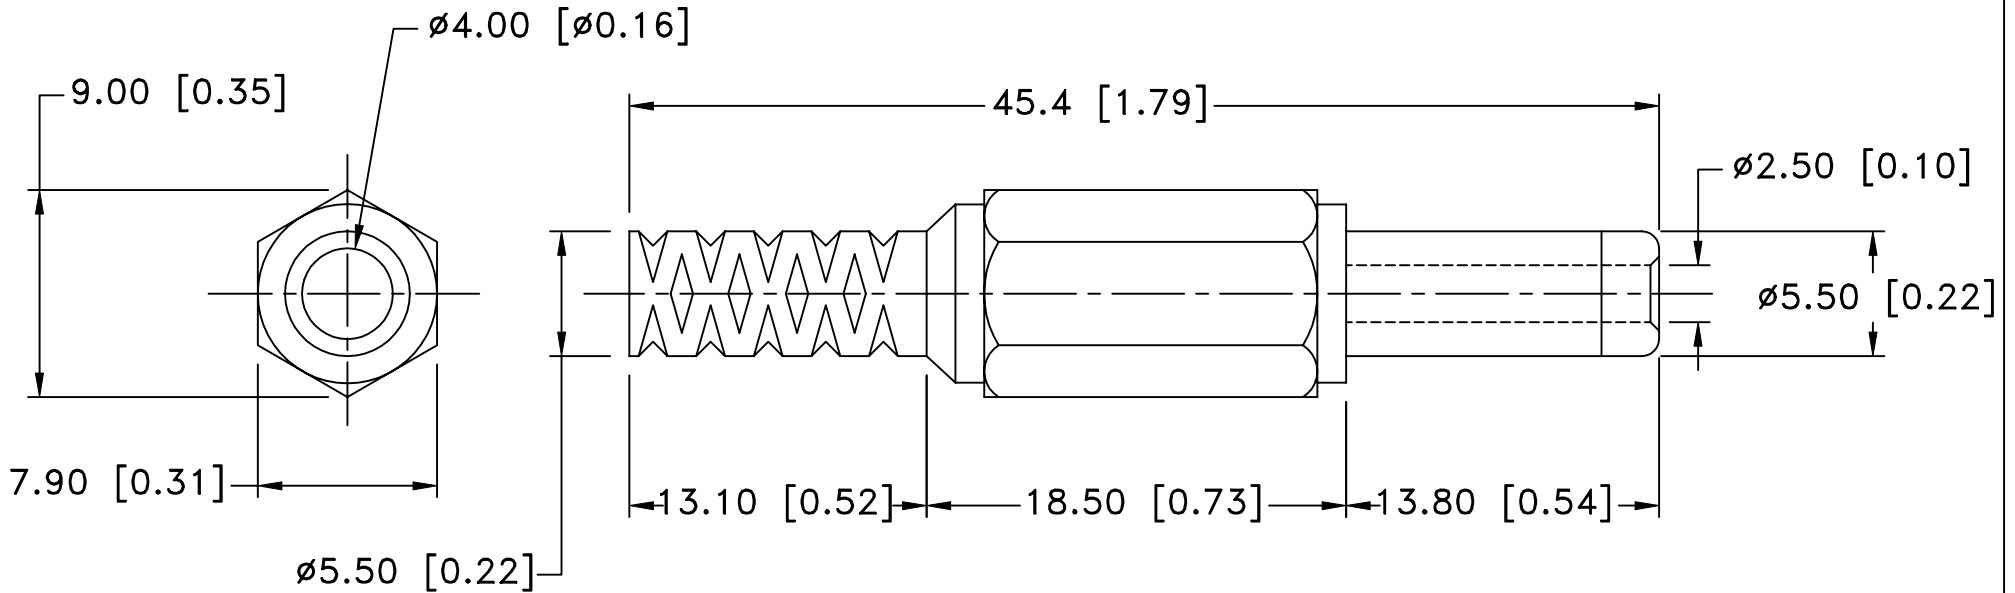


NOTES:

MAX. RATING: 12V 5A.

MATERIAL:

- 1) INSULATOR: ABS
- 2) PLUG: BRASS, NICKLE PLATED
- 3) COVER: PP

| | | |
|--------------------------------|---|---------------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | |
| decimal ±.5 (.020) | Scale | Drawn By B.S. |
| Fractional ± .8 (.030) | Title DC PLUG - 2.5mm MOLDED WITH STRAIN RELIEF | |
| Angular ± 3° | Date 08/16/03 | Drawing Number EP502-B |