DIMENSIONS mm (inches)

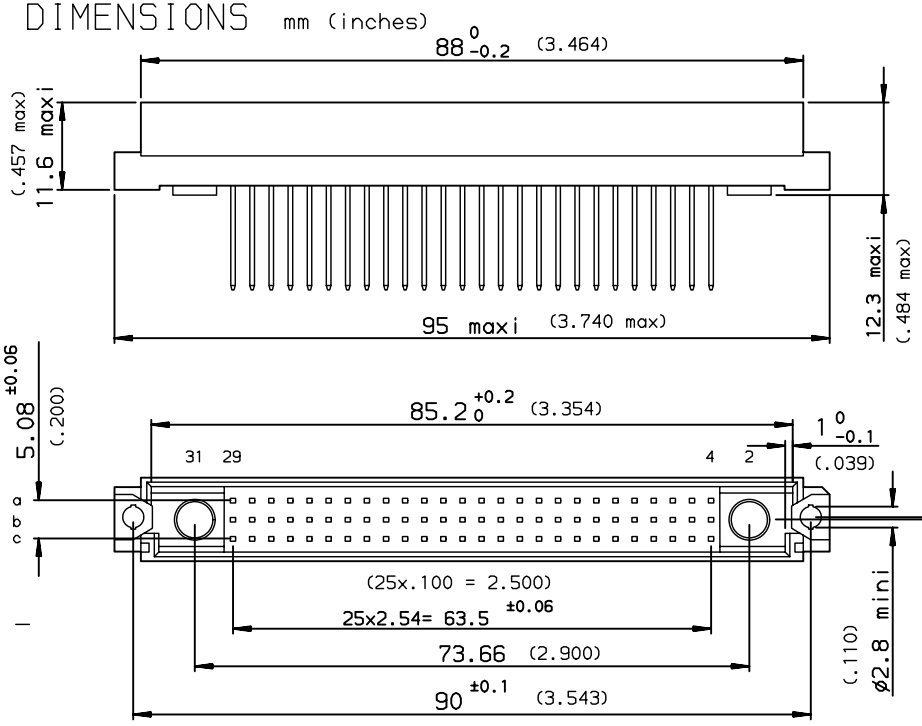

PCB DRILLING

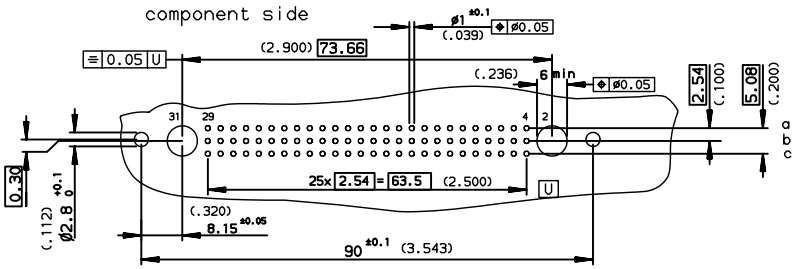

PART NUMBER	8609			A8	7	5	
PIN OUT							
rows a-b-c			3	78			
rows a-c			4	52			
NUMBER OF CONTACTS							
TERMINATION							
L = 13.3 ±0.25 (.523)		WW					15
L = 17.95 ±0.25(.706)		WW					25
PERFORMANCE CLASS							
DIN 41612 class 3							4
DIN 41612 class 2							5
DIN 41612 class 1							6
TERMINATION TYPE							
TIN LEAD							000E1
LEAD FREE							E1LF

GENERAL CHARATERISTIC and ROHS INFORMATION
SEE DRAWING C-8609-0000B

European Views

rev	ecn no	dr	date
B	-	HLE	1996/02/21
C	LS07-0130	HLE	2007/05/21
D	LS07-0211	HLE	2007/08/08
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com

surface ISO 1302 | tolerance std ISO 406 ISO 1101 | projection | mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

Dr	LEGALLIC	1996/02/21	ANGULAR	LINEAR	0.X	±0.1
Eng	LEGALLIC	1996/02/21			0.XX	±0.1
Chr	LEGARE	1996/02/21	0.XX° ±2°		0.XXX	±0.1
Appr	LEGARE	1996/02/21	Product family		DIN	

size A3 | Scale 1.5 | ECN LS07-0211 | Spec ref -

title: STRAIGHT MALE WITH SPECIAL CONTACTS WIRE WRAP

dwg no C-8609-0321 | Rev. D

catalog no SEE TABLE | CUSTOMER | sheet 1 of 1

REV F - 2006-04-17

Copyright FCI.

PDM: Rev:D STATUS: Released Printed: May 14, 2011