




## Conduit Couplers, HG-HG

Used to join two same diameter corrugated conduits together, couplers feature a snap-on design for a quick, secure connection. Designed for easy removal with a small screwdriver. Suitable for use on all types of corrugated conduits, both fine and course pitch material.



Conduit Size		Euro Size	HellermannTyton Part Number	Manufacturer Reference Number	Dimensions					
in.	mm	(NW)			B		C		D	
					in.	mm	in.	mm	in.	mm
3/8	16	12	HG038-HG038	FPA16-FPA16	0.43	11	1.14	29	2.32	59
1/2	21	17	HG050-HG050	FPA21-FPA21	0.57	14.5	1.26	32	2.8	71
3/4	28	23	HG075-HG075	FPA28-FPA28	0.77	19.5	1.73	44	3.19	81
1.00	34	29	HG100-HG100	FPA34-FPA34	1.04	26.5	2.01	51	3.43	87
1.50	54	48	HG150-HG150	FPA54-FPA54	1.65	42	2.99	76	4.49	114

Technical Properties and Performance	
Property	Rating
Material: Nylon PA66	Polyamide Nylon 66 (PA66)
Application:	Suitable for connecting two conduit systems.
IP (Ingress Protection) rating	IP66
Temperature Range	-50°C to +135°C
Color	Black
Thread Pattern	NA
Supplied with neoprene face seal washer	No
Suitable for fine or coarse pitch conduits	Yes
UL Recognized (File E229161)	Yes
UL Listed (File No. E247502)	No
UV Resistant	Yes
Halogen, Sulphur and Phosphorous free	Yes
Anti vibration and Tamper Resistant	Yes
Flammability: UL 94	V2
Country of Origin	United Kingdom

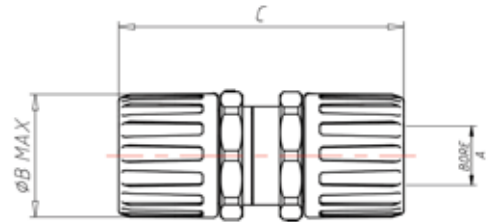

**Warranty Policy** HellermannTyton products are warranted to be free from defects in material and workmanship at the time sold by us; but our obligation under this warranty and that of the seller is limited to the replacement of the product, and neither we nor the seller are bound by any other warranty, expressed, implied or statutory. Under no circumstances are we or the seller liable for any loss, damage, expenses or consequential damages of any kind arising out of the use or inability to use these products. All are sold with the understanding that the user will test them in actual use and determine their adaptability for the intended uses. Every effort is made to ensure accuracy and completeness when describing the technical properties of these products.