
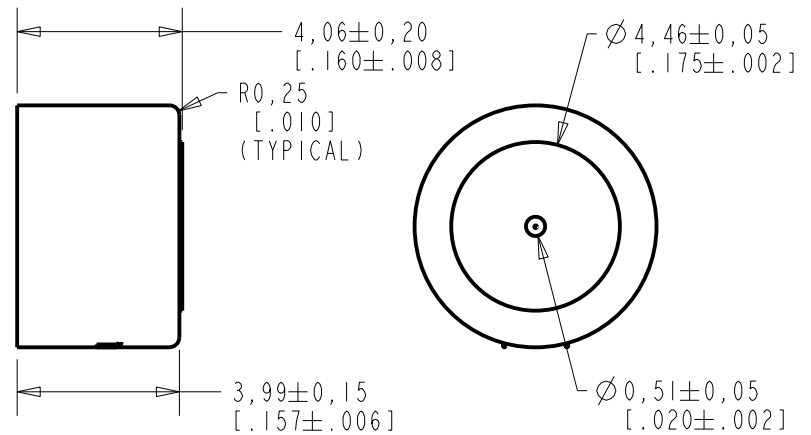


SR-32453-000

SHT 1.1

NOTES:

1 A POSITIVE GOING VOLTAGE AT THE POSITIVE TERMINAL, RELATIVE TO NEGATIVE TERMINAL, CAUSES A DECREASE IN PRESSURE AT THE SOUND OUTLET.

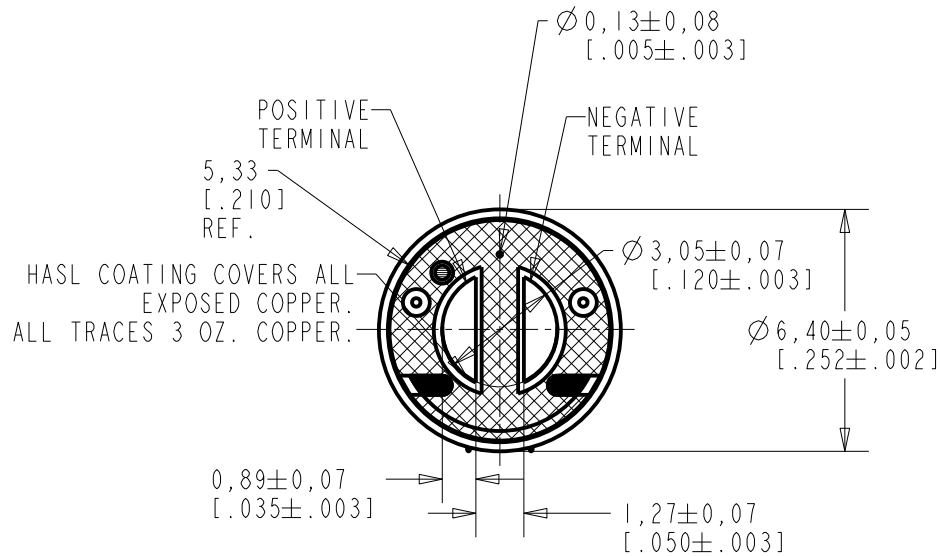

HASL COATING COVERS ALL EXPOSED COPPER. ALL TRACES 3 OZ. COPPER.



SCALE 2:1

NOMINAL WEIGHT
0.26 GRAMS

DIMENSIONS IN MILLIMETERS [INCHES]

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
C	CI0116604	12-26-14	Active	C
B	CI0116253	9-25-14		
A	CI0115858P	7-10-14		

SCALE: 5:1		DR. BY: SSUN	DATE: 7-10-14
DO NOT SCALE DRAWING			
TITLE: RECEIVER		SR-32453-000	
OUTLINE DRAWING		SHT 1.1	
		CK. BY: GJP	DATE: 7-10-14
		APP. BY: GJP	DATE: 7-10-14


THE SR-32453-000 IS A MAGNETIC BALANCED ARMATURE RECEIVER OPTIMIZED FOR USE IN EARPHONES.

NO DAMPING

SR-32453-000

SHEET 2.1

NOTE: SPECIFICATIONS FOLLOWED BY AN ASTERISK (*) ARE 100 % TESTED

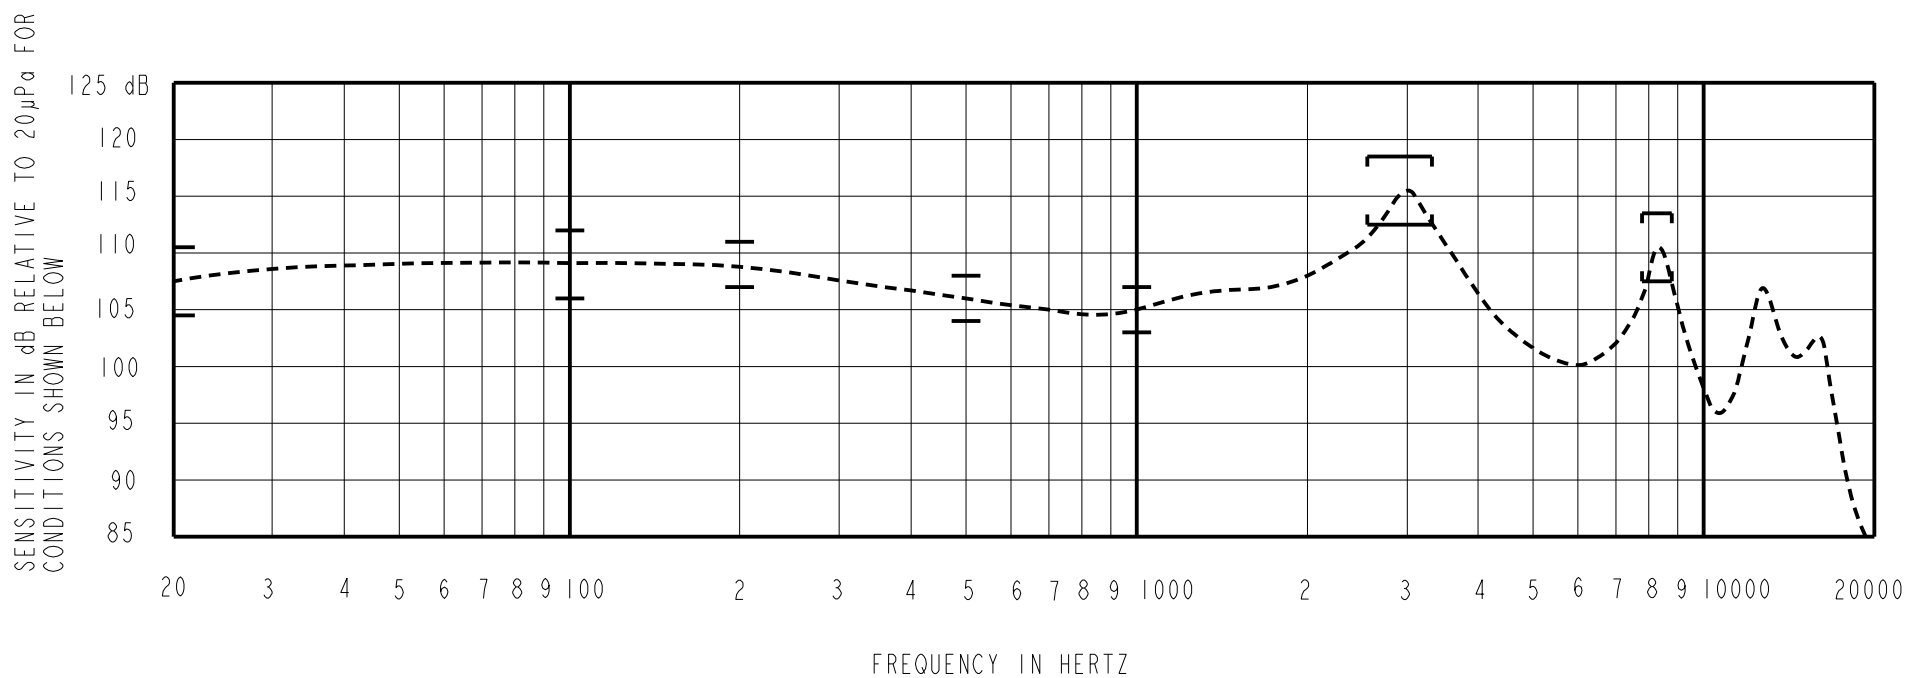

ACOUSTICAL

SENSITIVITY

DEVICE WILL PRODUCE THE SPL LISTED BELOW UNDER TEST CONDITIONS DESCRIBED IN TABLE 3.

NOMINAL SENSITIVITY AT 1kHz IS dB RELATIVE TO 20µPa. ALL OTHER VALUES IN dB RELATIVE TO THE SENSITIVITY AT 1kHz.

LIMIT TYPE	FREQUENCY (Hz)	MINIMUM	NOMINAL	MAXIMUM
REL	20	-0.5	+2.5	+5.5
REL	100	+1.0	+4.0	+7.0
REL	200	+2.0	+4.0	+6.0
REL	500	-1.0	+1.0	+3.0
REF	1000	-2.0	105.0	+2.0
PEAK	2550-3350	+7.5	+10.5	+13.5
PEAK	7800-8800	+2.5	+5.5	+8.5

MECHANICAL CHARACTERISTICS

SOLDER TYPE: SAC305 (LEAD FREE)
 SOLDERING TEMPERATURE: 400°C FOR 2 SECONDS MAX.
 STORAGE TEMPERATURE: -40°C TO 63°C
 OPERATING TEMPERATURE: 0°C TO 63°C

AT EXTREME ENDS OF THE OPERATING TEMPERATURE THE SENSITIVITY WILL NOT VARY MORE THAN ±3 dB FROM ROOM TEMPERATURE

TABLE 1

TOTAL HARMONIC DISTORTION

DEVICE WILL NOT EXCEED TOTAL HARMONIC DISTORTION LEVELS LISTED BELOW.

FREQUENCY (Hz)	AC DRIVE (V rms)	DC BIAS (V)	MAX (%)
1/3 PEAK (TYP. 964)	0.1	0	5
1/2 PEAK (TYP. 1446)	0.1	0	5
1/3 PEAK (TYP. 964)	0.3	0	10
1/2 PEAK (TYP. 1446)	0.3	0	10

TABLE 2

TEST CONDITIONS

NOMINAL SOURCE VOLTAGE	0.1 V rms, 0 mA DC BIAS
SOURCE IMPEDANCE	<1 Ohm
TUBING	7mm [.236"] LONG, 2.2mm [.039"] I.D.
COUPLER CAVITY	IEC 60318-4 ("711") COUPLER

TABLE 3

ELECTRICAL

DC RESISTANCE	25.0 Ohms ± 10%
IMPEDANCE @ 500 Hz	32.5 Ohms ± 15%
IMPEDANCE @ 1 KHz	46.0 Ohms ± 20%

TABLE 4

ISOLATION: CASE WILL BE ELECTRICALLY ISOLATED FROM THE COIL CIRCUIT.

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
C	C10116604	12-26-14	Active	C
B	C10116253	9-25-14		
A	C10115858P	7-10-14		
WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION			DR. BY	DATE
TITLE: RECEIVER PERFORMANCE SPECIFICATION			SSUN	7-10-14
			SR-32453-000 SHT 2.1	
			GJP	7-10-14
			APP. BY	DATE
			GJP	7-10-14

KNOWLES ELECTRONICS
 ITASCA, ILLINOIS U.S.A.